

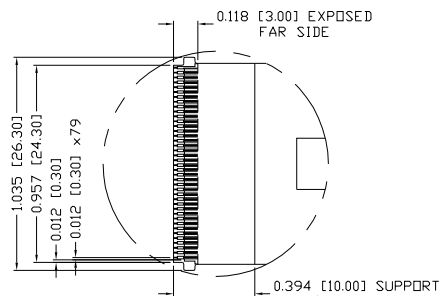
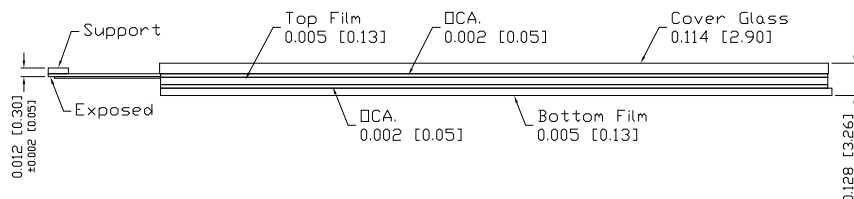


Detail A
SCALE: NTS
REFERENCE ONLY

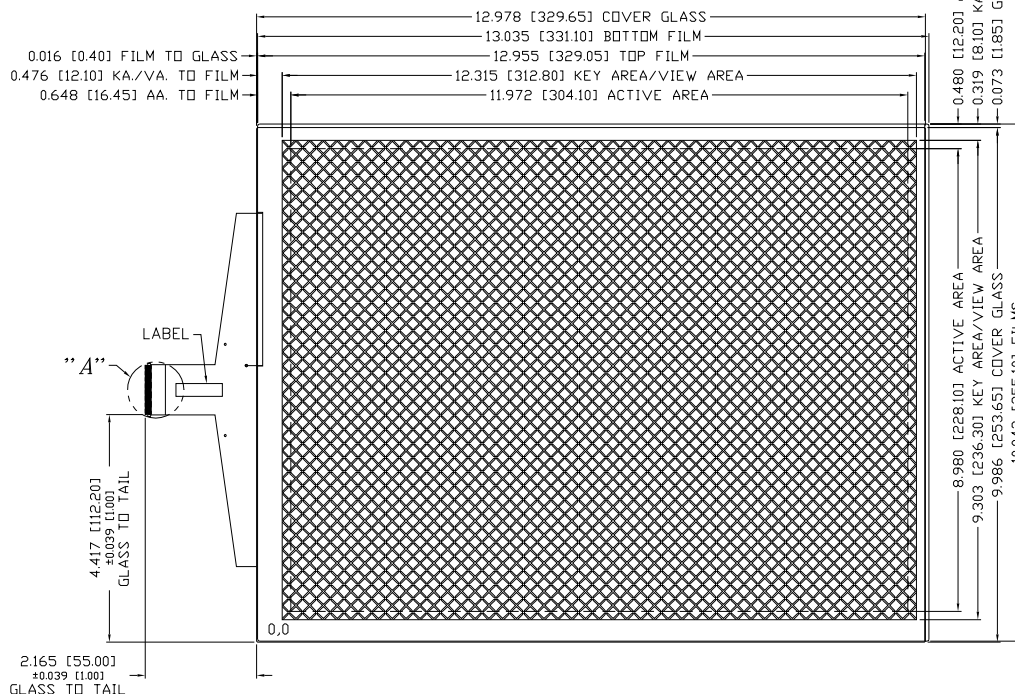

Key Matrix

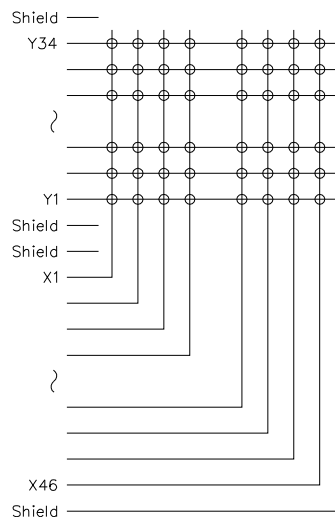

REVISIONS		
REV.	DESCRIPTION	DATE
0	INITIAL RELEASE	07/24/13
A	ECO #230811 UPDATE WHERE SENSOR SPECIFICATION INFORMATION IS SHOWN.	08/26/13
B	ECO #240212 UPDATE OPERATION & STORAGE TEMPERATURES.	08/26/13
C		
D		
E		
F		

GENERAL NOTES:

- MAX. VOLTAGE:
3 V p-p
- OPERATION TEMPERATURE:
-10°C TO 60°C
- HUMIDITY:
< 40°C 20% TO 95% RH NO CONDENSATION.
- STORAGE TEMPERATURE:
-20°C TO 70°C
- FFC BEND R > 2.0MM
NO SHARP CREASE
- OPTICAL PER:
84% TRANSPARENCY
PER JIS K7361-1
- TP CONTROLLER INFO:
USB - PART # 203-0063 V1.101
RS-232 - PART # 203-0072 V1.060

CAD DRAWING NOTICE THIS DRAWING EMBODIES A PROPRIETARY DESIGN ORIGINATED BY GUNZE ELECTRONICS USA CORPORATION AND SHALL NOT BE DISCLOSED, USED, OR DUPLICATED FOR PROCUREMENT OR MANUFACTURING PURPOSES, UNLESS SPECIFICALLY AUTHORIZED BY GUNZE ELECTRONICS USA CORPORATION. ALL PATENT RIGHTS RELATING HERETO ARE EXPRESSLY RESERVED FOR GUNZE ELECTRONICS USA CORPORATION. This notice shall be marked on any reproduction hereof in whole or part.	DEC. TOLERANCES: XXX = ±0.012 [.XX] = ±[0.30] ANGULAR TOL. ±1° FRAC. TOL. XX = ±1/16	DESIGNER: VTRINH 07/24/13 CHKD: DESIGN ENG. LHRUIZ 07/24/13 VIEW POINT: 	GUNZE USA Gunze Electronics USA Corporation 2113 Wells Branch Parkway Austin, Texas 78728 TITLE: 15.0D, 34x46; P-CAP (EETI) PART NO. 170-2951 CUSTOMER ID: GUNZE USA
	DIM CODE: INCHES [MILLIMETERS] CUSTOMER #: P150-03-2D MATERIAL SPEC: P-Cap Internal	RELE. 02/28/14	