



REVISIONS		
REV.	DESCRIPTION	DATE
0	PRELIMINARY RELEASE	08/05/13
A	ECO 230811: Up-date where the Sensor Specification Information is shown.	08/28/13
B		
C		
D		
E		
F		


- GENERAL NOTES:
- MAX. VOLTAGE:
3 V p-p
 - OPERATION TEMPERATURE:
0° TO 50°C
 - HUMIDITY:
< 40°C 20% TO 95% RH NO CONDENSATION.
 - STORAGE TEMPERATURE:
-10°C TO 60°C
 - FFC BEND R > 2.0MM
NO SHARP CREASE
 - TP CONTROLLER INFO:
USB - PART #1005-0070
CABLE - PART # TBD
 - OPTICAL PER:
84% TRANSPARENCY
PER JIS K7361-1

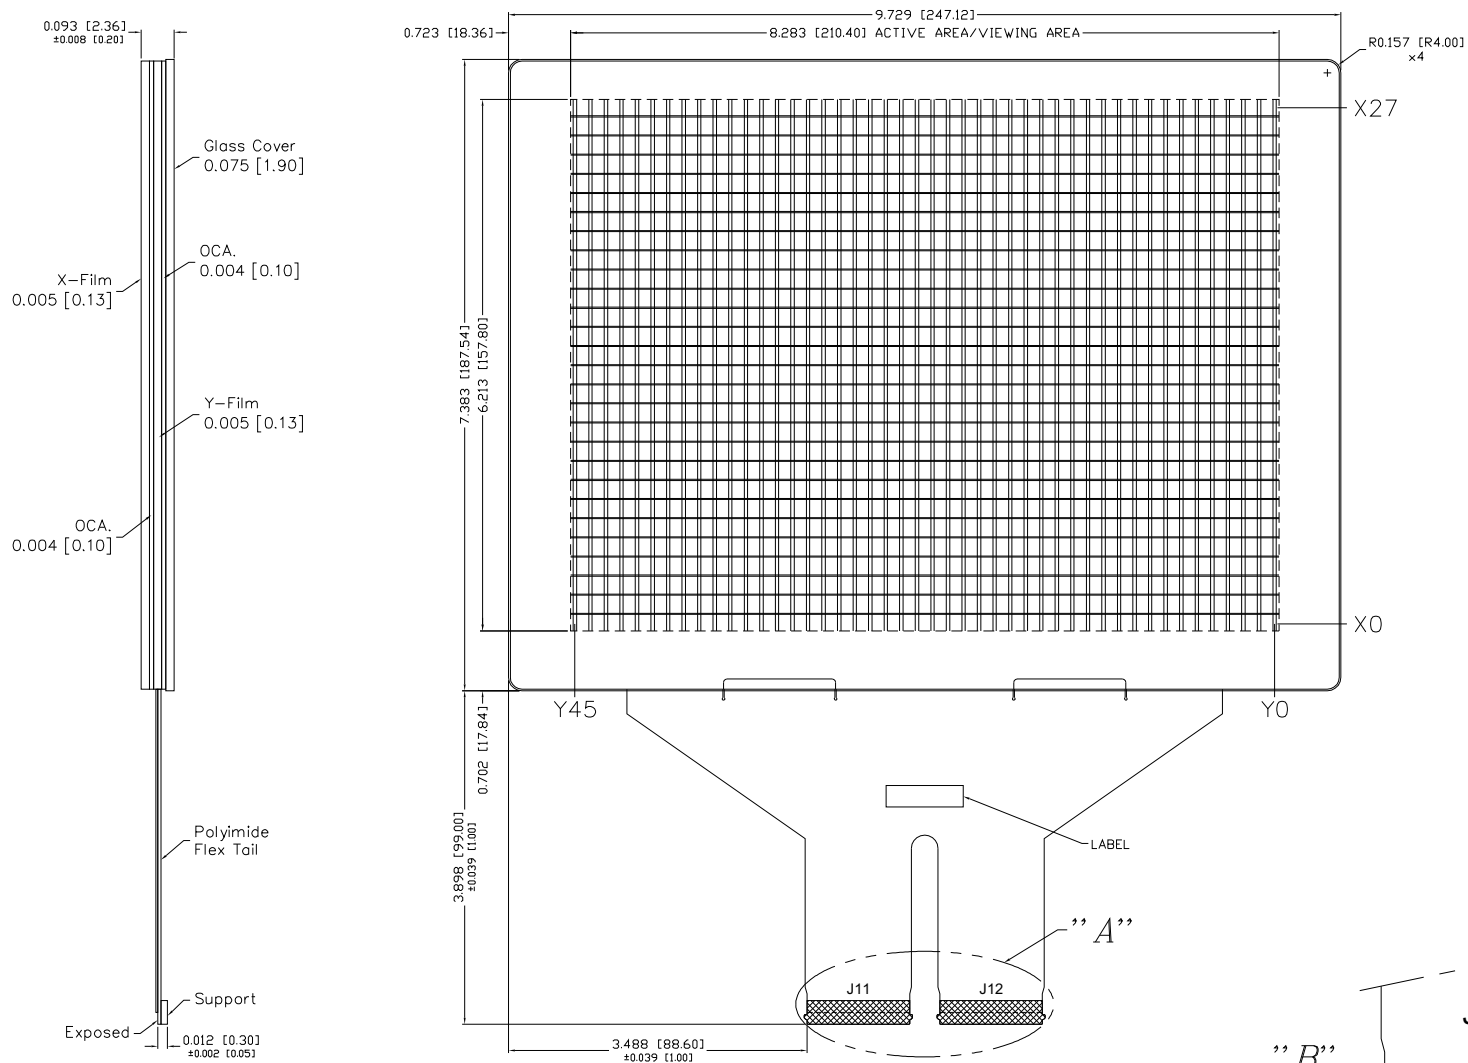


Detail B
SCALE: NTS

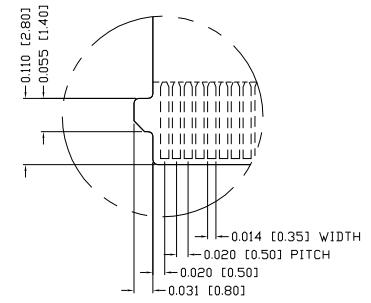

Detail A
SCALE: NTS

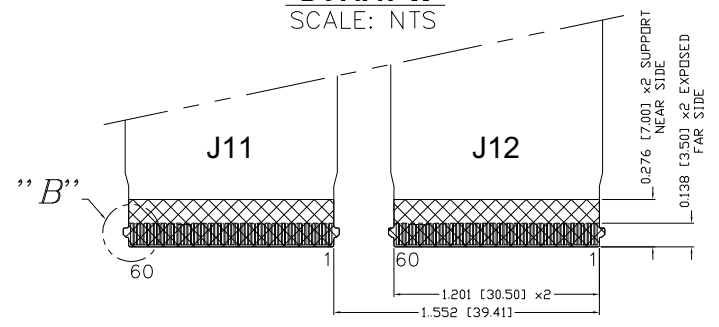

Key Matrix

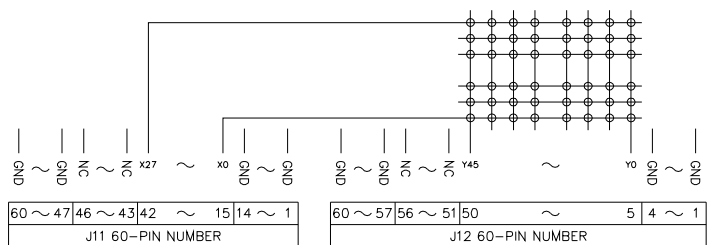

CAD DRAWING
NOTICE
THIS DRAWING EMBODIES A PROPRIETARY DESIGN ORIGINATED BY GUNZE ELECTRONICS USA CORPORATION AND SHALL NOT BE DISCLOSED, USED, OR DUPLICATED FOR PROCUREMENT OR MANUFACTURING PURPOSES UNLESS SPECIFICALLY AUTHORIZED BY GUNZE ELECTRONICS USA CORPORATION. ALL PATENT RIGHTS RELATING HERETO ARE EXPRESSLY RESERVED FOR GUNZE ELECTRONICS USA CORPORATION.
This notice shall be marked on any reproduction hereof in whole or part.

DEC TOLERANCES: XXX = ±0.012 [XX] = ±[0.30]	DESIGNER: VTRINH 08/05/13
ANGULAR TOL. = ±1° FRAC. TOL. XX = ±1/6	DESIGN ENG. LHRUIZ 08/05/13
DIM CODE: [INCHES] [MILLIMETERS]	VIEWPOINT:
CUSTOMER #:	RELEASE: 08/05/13
MATERIAL SPEC: P-Cap Internal	

GUNZE USA
Gunze Electronics USA Corporation
2113 Wells Branch Parkway
Austin, Texas 78728

TITLE:
10.4D, 28x46; P-CAP.ATMEL

PART NO.: 170-3970
CUSTOMER ID: GUNZE USA

SCALE: 2 : 1
REVISION: