



REVISIONS		DATE
REV.	DESCRIPTION	
D	INITIAL RELEASE	2/15/13
A	Small quantity (100) and 1000 qty	4/17/13
F	Flow Tuff Coating	05/25/13
C	Change 11, 30-File where the center of the viewing area is located to 4.31mm	06/27/13
B		
A		
C		
D		

GENERAL NOTES:


- MAX. VOLTAGE:
3 V p-p
- OPERATION TEMPERATURE:
0° TO 50°C
- HUMIDITY:
< 40°C 20% to 95% RH NO
CONDENSATION.
- STORAGE TEMPERATURE:
-10°C TO 60°C
- FFC BEND R > 2.0MM
NO SHARP CREASE
- TP CONTROLLER INFO:
USB - PART #1005-0070
CABLE - PART # TBD
- OPTICAL PER.
84% TRANSPARENCY
PER JIS K7361-1

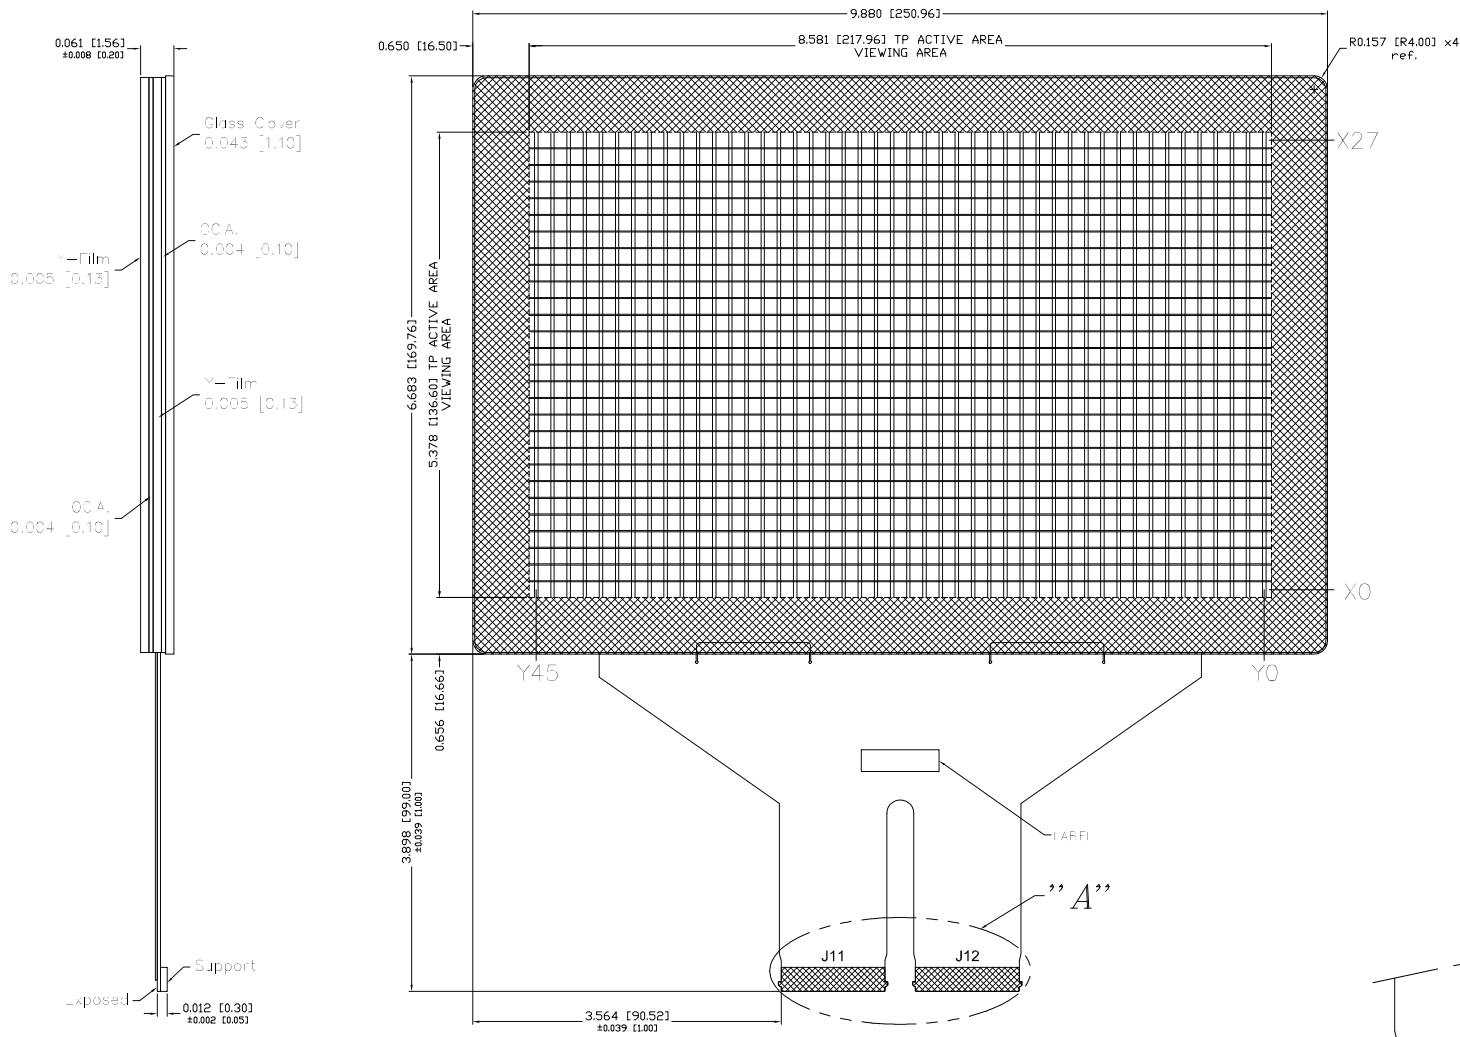



Detail B
SCALE: NTS

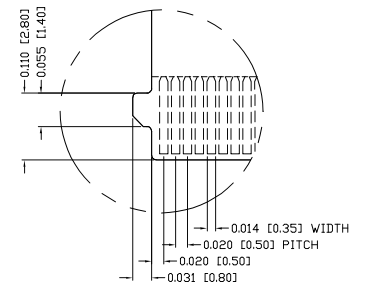

Detail A
SCALE: NTS

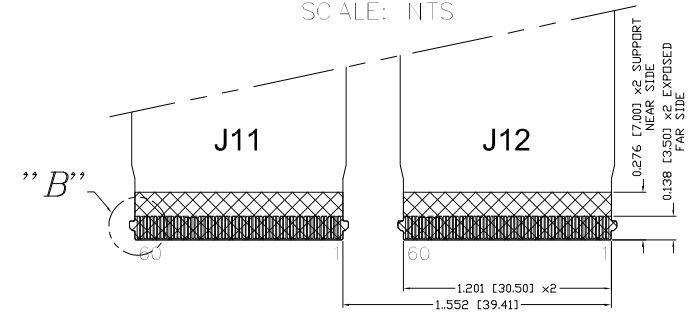

Key Matrix

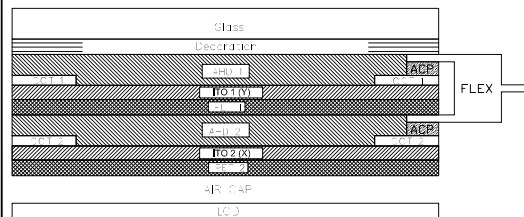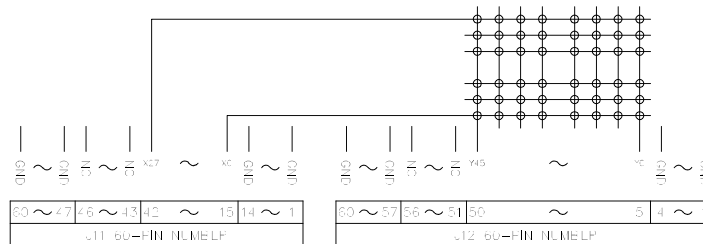

CAD DRAWING NOTICE THIS DRAWING EMBODIES A PROPRIETARY DESIGN ORIGINATED BY GUNZE ELECTRONICS USA CORPORATION AND SHALL NOT BE DISCLOSED, USED, OR DUPLICATED FOR PROCUREMENT OR MANUFACTURING PURPOSES, UNLESS SPECIFICALLY AUTHORIZED BY GUNZE ELECTRONICS USA CORPORATION. ALL PATENT RIGHTS RELATING HERETO ARE EXPRESSLY RESERVED FOR GUNZE ELECTRONICS USA CORPORATION. This notice shall be marked on any reproduction hereof in whole or part.	DEC. TOLERANCES: .XXX = ±0.012 [.XX] = ±[0.30] ANGLUAR TOL. = ±1° FRAC. TOL. X/4 = ±1/16	DESIGNER: VTRINH 02/19/13 CHRD. DESIGN ENR: LHRUIZ 02/19/13 VIEWPORT:	GUNZE USA Gunze Electronics USA Corporation 2113 Wells Branch Parkway Austin, Texas 78728 TITLES: ATMEL CONTROLLER 10.1D, 28x46; P-CAP
	ORN CODE: (INCHES) (MILLIMETERS) CUSTOMER ID: P-Cap Internal MATERIAL SPEC. P-Cap Internal	R/USE: 08/27/13	PART NO. 170-R3880 CUSTOMER ID: GUNZE USA