


Pin#	Assignment
1	UR
2	LR
3	S
4	UL
5	LL



NOTES:

1. ITO GLASS THICKNESS : 2.80mm
2. OVERALL THICKNESS : 3.30±0.30mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
7. OTHER SPEC : SEE APPROVAL SHEET

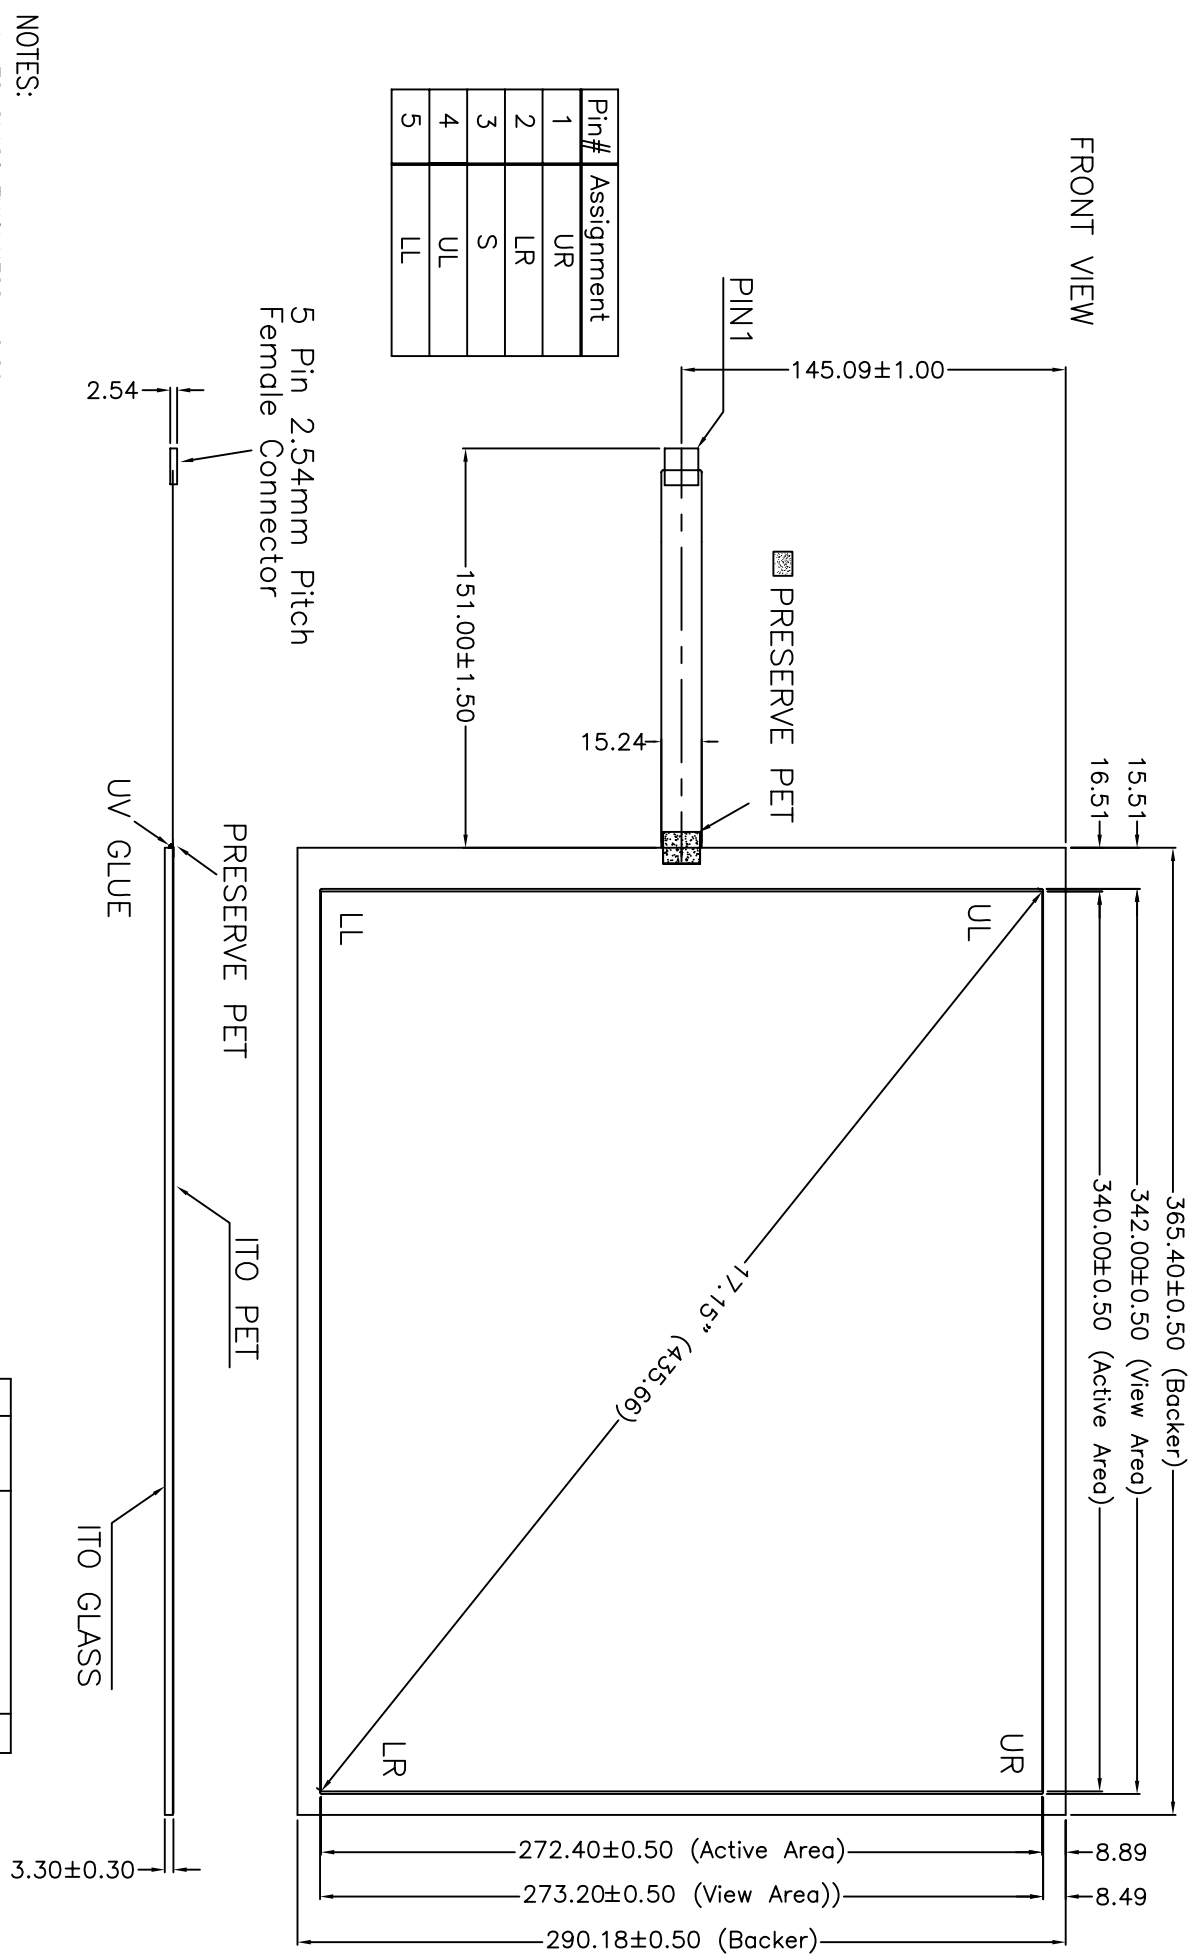

NO.	DATE	REVISION	DESCRIPTION	CHK
A	MAR0607		Pattern modified	Alex

CHIEF OF DESIGN	APPROVED	DATE
ENGINEER	PROJECT NUMBER	MAR. 06.2007
DRAWN BY	WILLIAM	REV.

TOLERANCES UNLESS SPECIFIED	MODEL NAME :
.X	2512
.XX	DWG NO : 2512-1-01
.XXX	SCALE: 1:1
± 0.30	UNIT: mm

Apex Material Technology Corp.