


FRONT VIEW

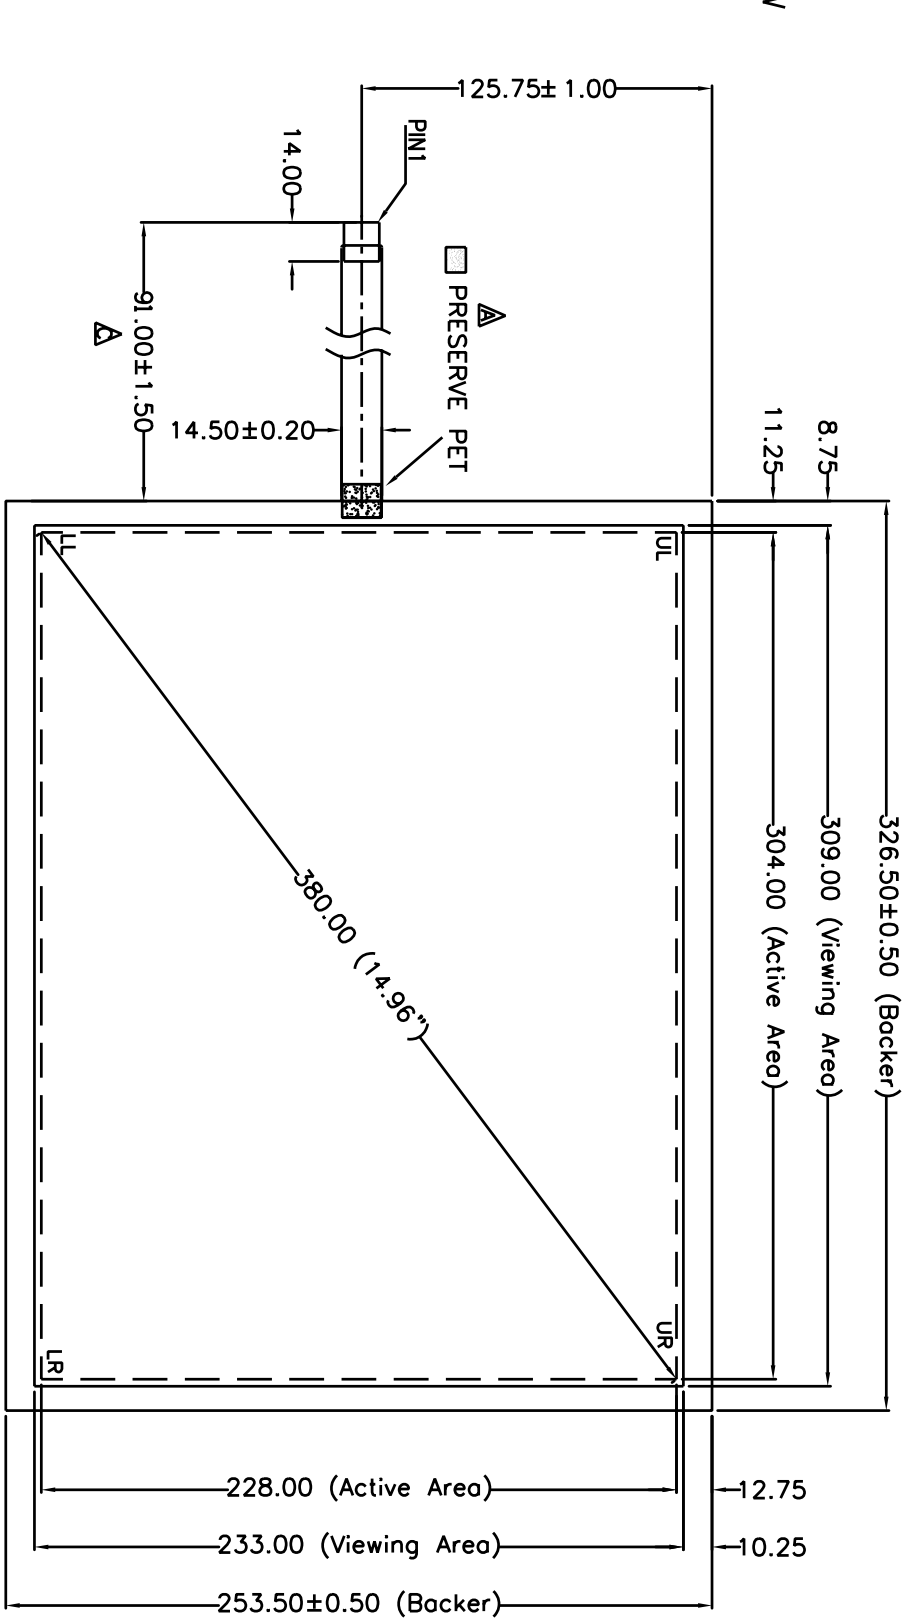

Pin#	Assignment
1	UR
2	LR
3	S
4	UL
5	LL

NOTES:

1. ITO GLASS THICKNESS : 2.80mm
2. OVERALL THICKNESS : 3.30±0.30mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
7. OTHER SPEC : SEE APPROVAL SHEET



NO.	DATE	DESCRIPTION	CHK
C	Sep.28.2006	Modify the tail length to be 91mm	Alex
B	Jul.14.2006	According to customer requirement, Add UV glue bonding pad more.	Alex
A	Jul.06.2006	Add preserve PET and UV glue on tail to product.	Alex

CHG OF DESIGN	APPROVED	DATE	PRODUCT NUMBER
ENGINEER	Alex	Sep.28, 2006	
DRAWN BY	William		

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED	PROJECT NAME
.X ± 0.50	2513
.XX ± 0.50	DMG NO : 2513-3-01
.XXX ± 0.30	SCALE: 1:1 UNIT: mm