


FRONT VIEW

Pin#	Assignment
1	LL
2	UL
3	S
4	LR
5	UR



- NOTES:
1. ITO GLASS THICKNESS : 1.80mm
 2. OVERALL THICKNESS : 2.30±0.30mm
 3. CONNECTOR AND PINOUT AS INDICATED
 4. FRONT SURFACE : ANTI-GLARE HARDCOAT
 5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
 6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
 7. OTHER SPEC : SEE APPROVAL SHEET

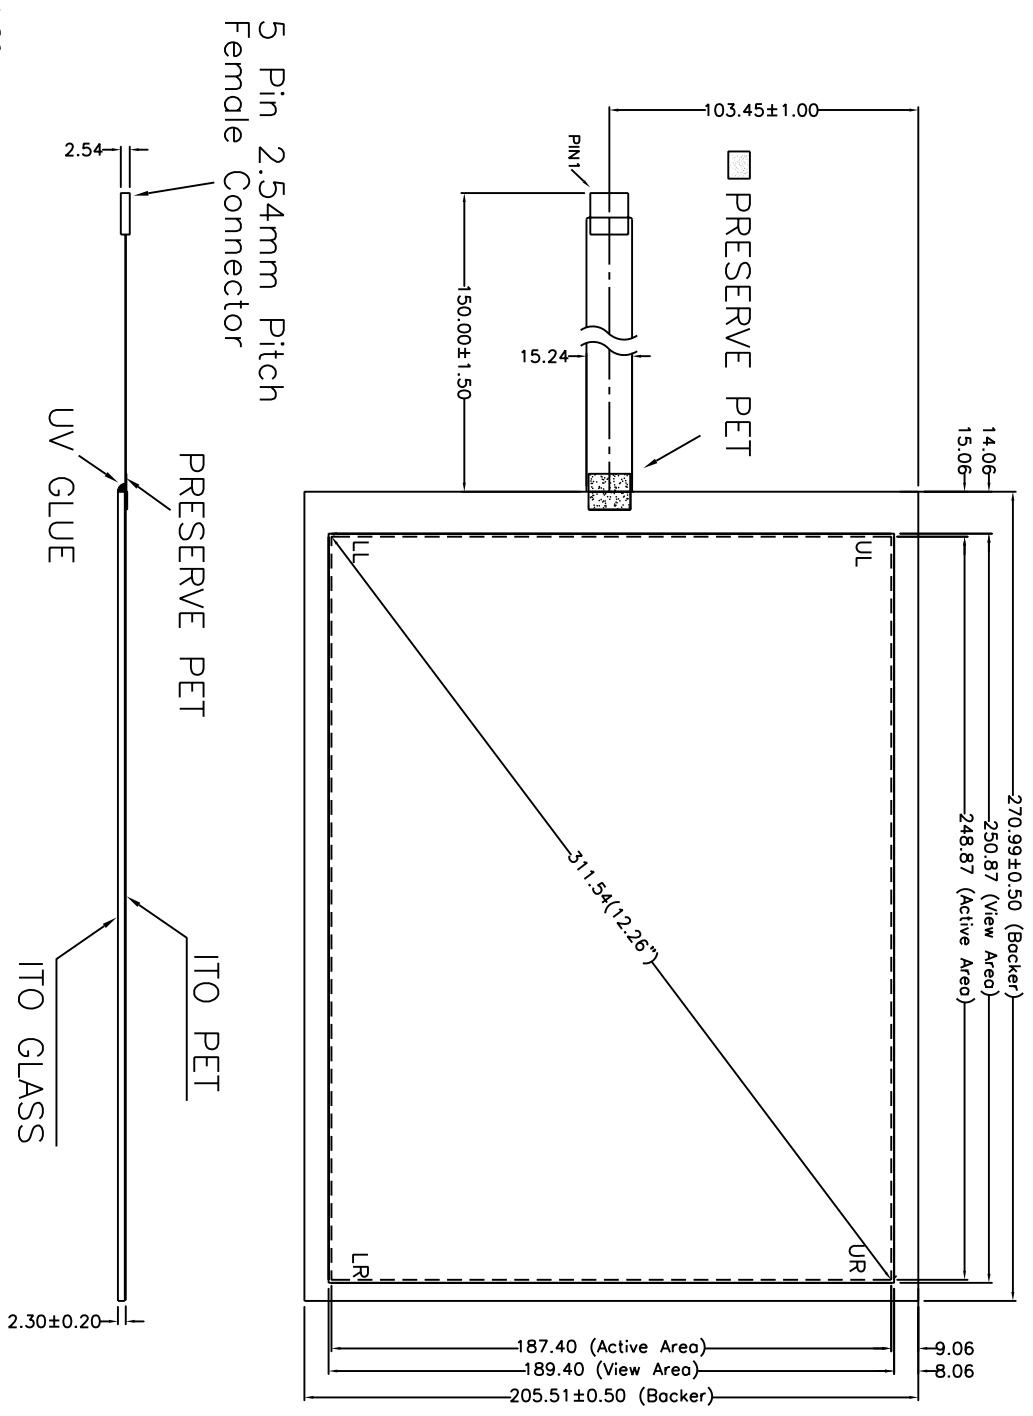

NO.	DATE	REVISION	DESCRIPTION	CHK
A	Mar.06.07		Pattern modified	Alex

CHIEF OF DESIGN	APPROVED
ENGINEER	PROJECT MANAGER
DRAWN BY: William	DATE: Mar.06. 2007
REV.:	D

Apex Material Technology Corp.	
TOLERANCES UNLESS SPECIFIED	MODEL NAME : 2514
.X	± 0.50
.XX	± 0.50
.XXX	± 0.30
ANGULAR	± 0.30
SCALE: 1:1	UNIT: mm