

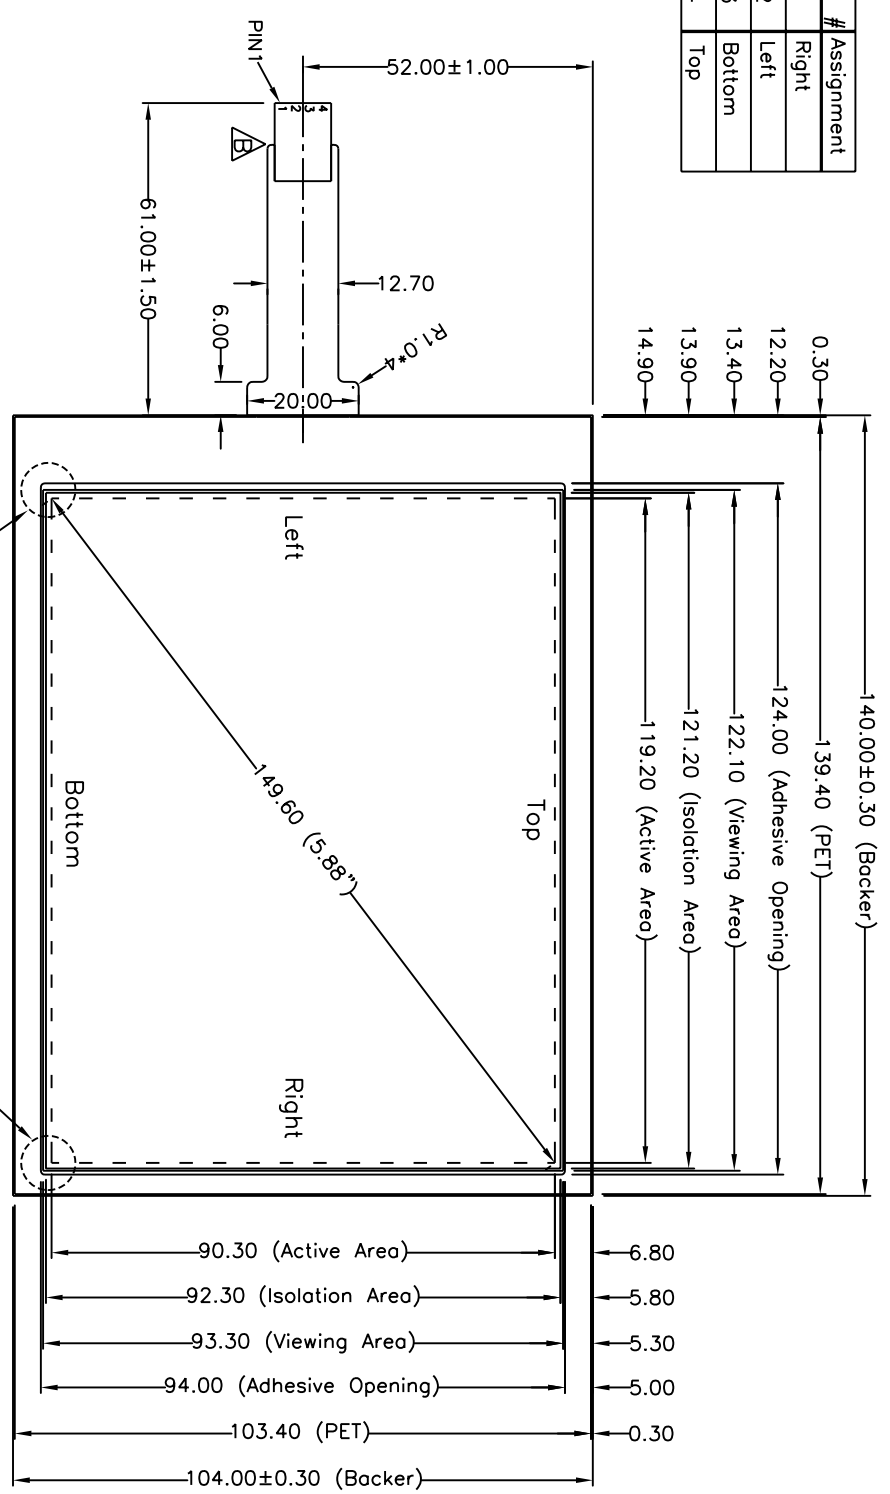
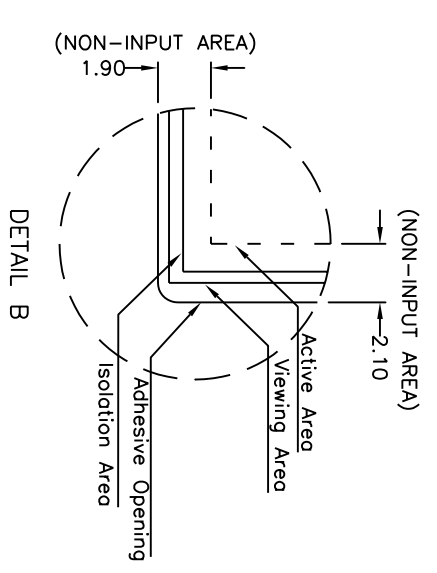


FRONT VIEW

Pin #	Assignment
1	Right
2	Left
3	Bottom
4	Top

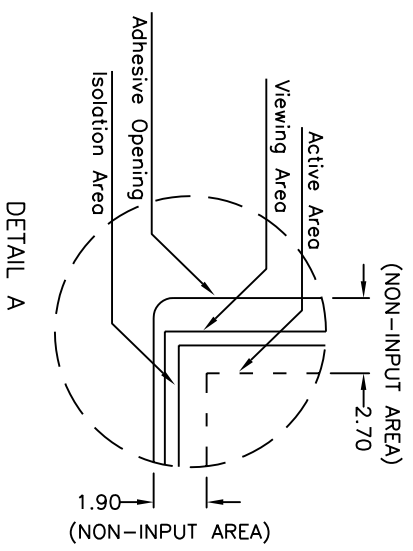

NOTES:

1. ITO GLASS THICKNESS : 1.10mm
2. OVERALL THICKNESS : 1.40±0.10mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.30mm
6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
7. OTHER SPEC : SEE APPROVAL SHEET



NO.	DATE	DESCRIPTION	CHK
C	DEC 30, 2005	CIRCUIT DESIGN MODIFY	ALEX
B	MAY 26, 2005	CONDUCTOR GOLD PLATING	ALEX
A	AUG 16, 2004	ADD UV GLUE TO TAIL LOCATION	ALEX

NO.	DATE	DESCRIPTION	CHK
REVISION			
		APPROVED	Alex
ENGINEER		PROJECT MGR	
DRAWN BY	Jerry	DATE	DEC 30, 2005
SHT	1 OF 1	REV.	C

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED		PROJECT NAME : 9523
X	± 0.50	PRODUCT NO : 9523-3-01
XX	± 0.50	SCALE : 1:1
XXX	± 0.30	UNIT : mm