


| Pin# | Assignment |
|------|------------|
| 1 | LL |
| 2 | UL |
| 3 | S |
| 4 | LR |
| 5 | UR |



- NOTES:
1. ITO GLASS THICKNESS : 2.80mm
 2. OVERALL THICKNESS : 3.20±0.30mm
 3. CONNECTOR AND PINOUT AS INDICATED
 4. FRONT SURFACE : ANTI-GLARE HARDCOAT
 5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
 6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
 7. OTHER SPEC : SEE APPROVAL SHEET

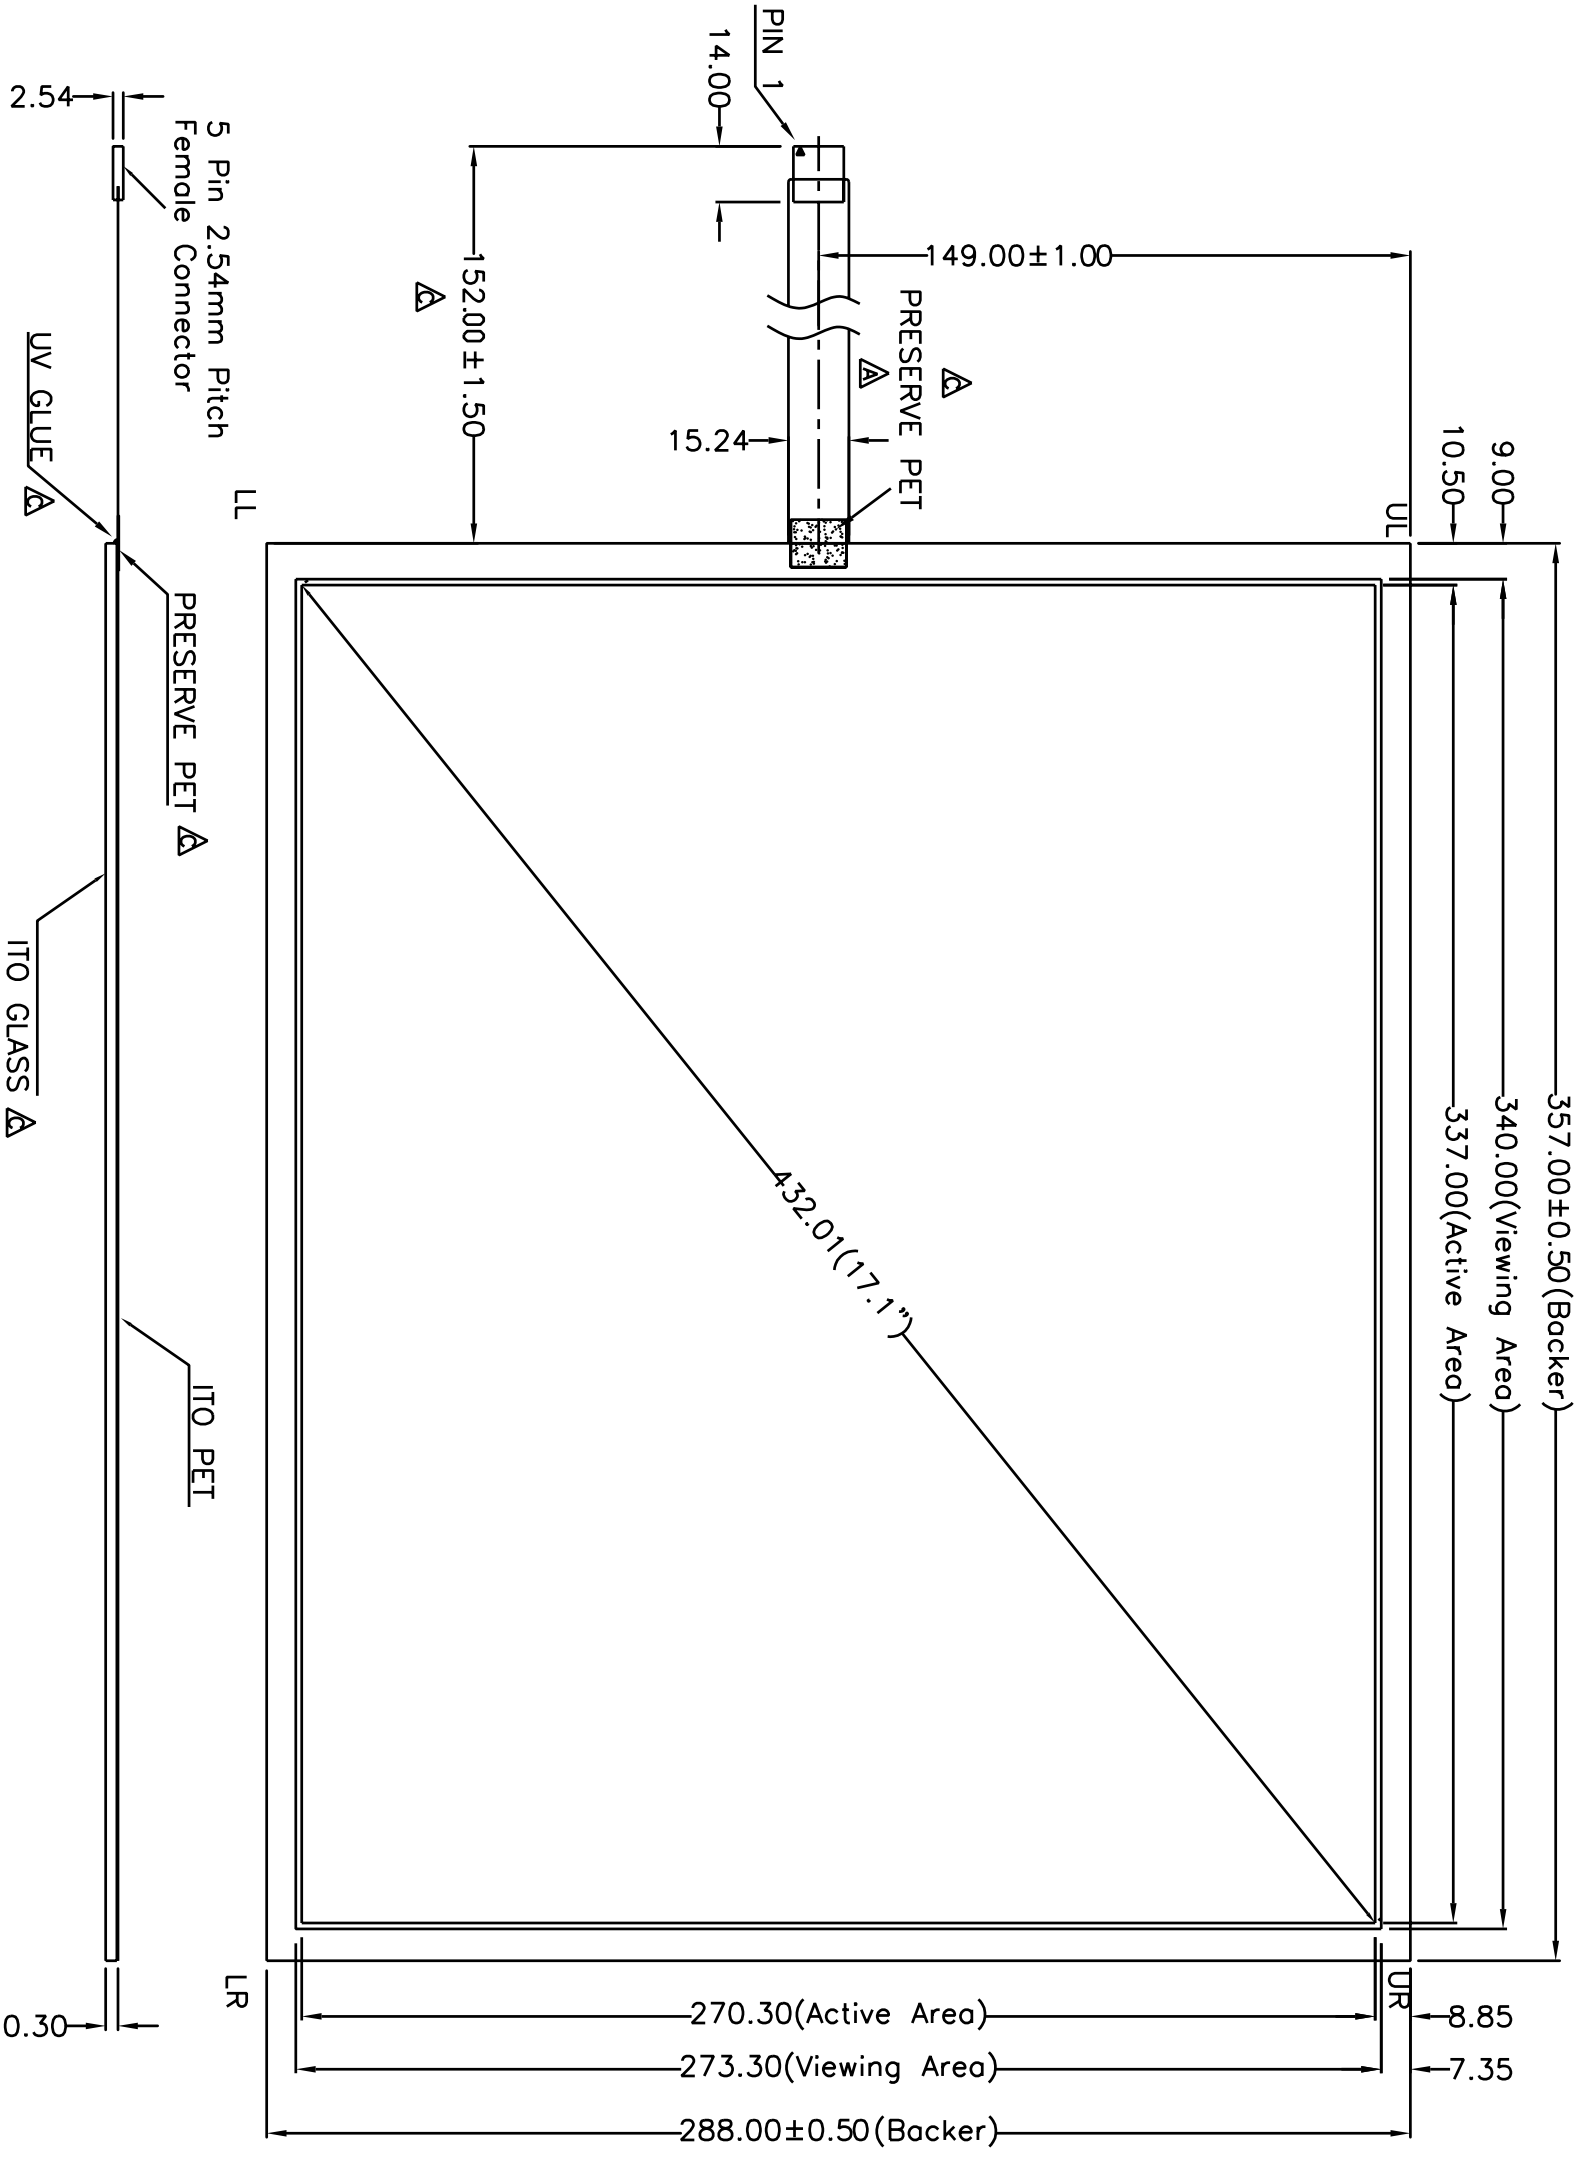

| NO. | DATE | REVISION | DESCRIPTION | CHK |
|-----|--------------|----------------------|-------------|------|
| C | MAY 3, 2007 | MATERIAL/TAIL LENGTH | MODIFY | ALEX |
| B | FEB 13, 2006 | MATERIAL | MODIFY | ALEX |
| A | SEP 20, 2005 | FPC TAIL CHANGE | | ALEX |

| | | |
|-----------------|-----------------|-------------|
| CHIEF OF DESIGN | APPROVED | Alex |
| ENGINEER | PROJECT MANAGER | |
| DRAWN BY | DATE | MAY 3, 2007 |
| SHT 1 OF 1 | REV. | C |

Apex Material Technology Corp.

| TOLERANCES UNLESS SPECIFIED | PROJECT NAME : 2505 |
|-----------------------------|---------------------|
| X | ± 0.50 |
| XX | ± 0.50 |
| XXX | ± 0.50 |
| ANGULAR | |

DWG NO : 2505-3-01
SCALE: 1:1 UNIT: mm