

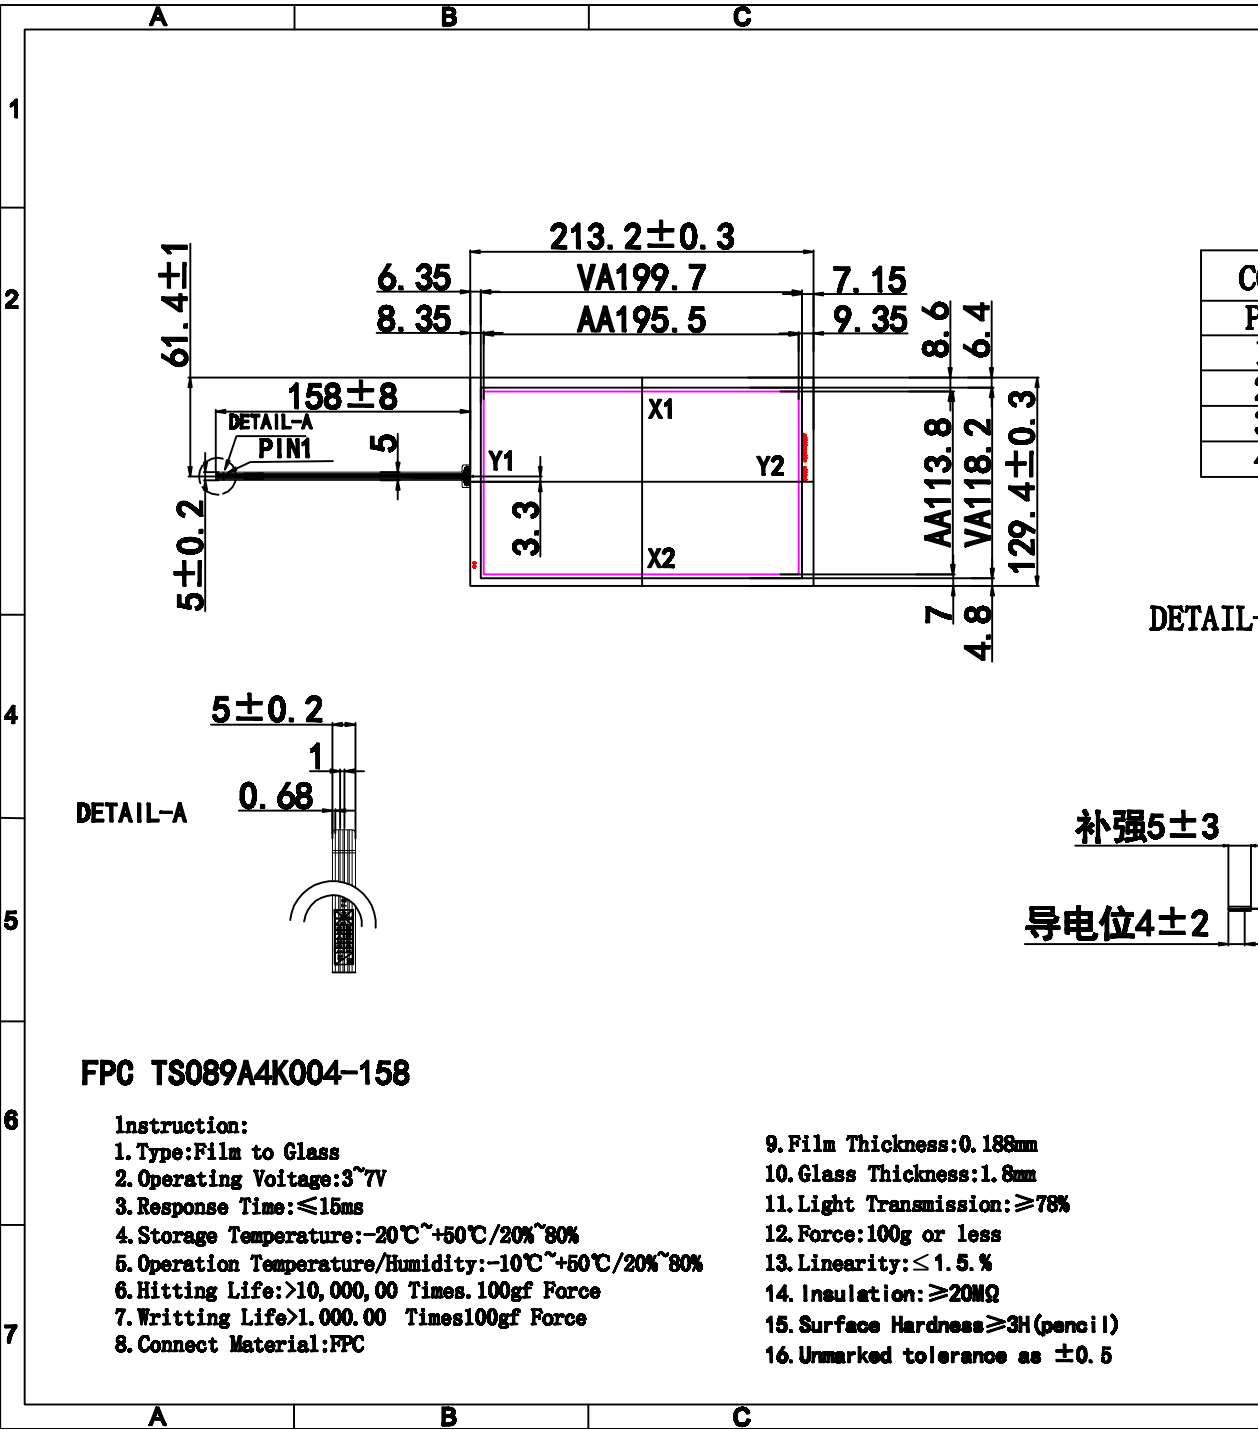


E	F	G
标记(mark)	修改内容(revised contents)	签名(signature) 日期(Date)
1		





Contact Side:

CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	Y2
2	X1
3	Y1
4	X2

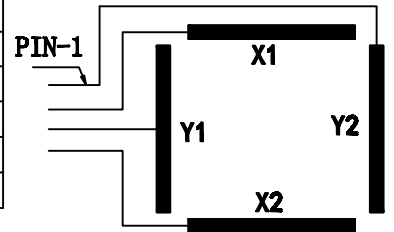

DETAIL-B

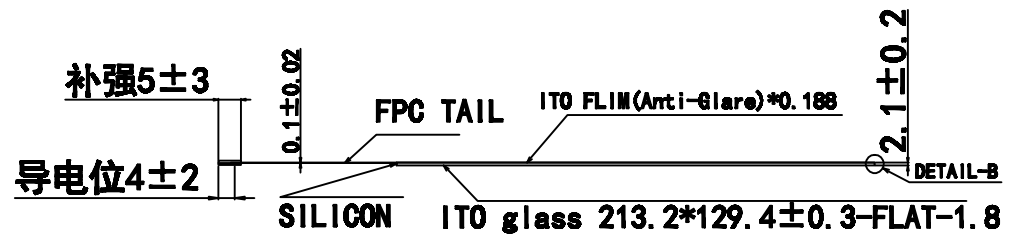

FPC TS089A4K004-158

Instruction:

- | | |
|--|-----------------------------------|
| 1. Type: Film to Glass | 9. Film Thickness: 0.188mm |
| 2. Operating Voltage: 3~7V | 10. Glass Thickness: 1.8mm |
| 3. Response Time: ≤15ms | 11. Light Transmission: ≥78% |
| 4. Storage Temperature: -20℃~+50℃/20%~80% | 12. Force: 100g or less |
| 5. Operation Temperature/Humidity: -10℃~+50℃/20%~80% | 13. Linearity: ≤1.5% |
| 6. Hitting Life: >10,000,00 Times. 100gf Force | 14. Insulation: ≥20MΩ |
| 7. Writting Life: >1,000,00 Times. 100gf Force | 15. Surface Hardness: ≥3H(pencil) |
| 8. Connect Material: FPC | 16. Unmarked tolerance as ±0.5 |

TITLE: 产品编号		TS089A4K004			
Designed By: 设计		Customerid: 客户编号	TPO89W4N1	View: 投影方式	
Checked By: 审核		Unit: 单位	mm	Scale: 比例	1:1
Approved By: 批准		Date: 日期	20180227		