

LED Monitor with SuperClear® IPS

5:4 Aspect Ratio with 1280x1024 Resolution

VA951S



Ideal for business-specific legacy applications, the ViewSonic® VA951S display features a standard 5:4 aspect ratio and 1280x1024 resolution. With a compact square shape, this 19" display can also be used as a countertop monitor in retail and public environments with space constraints. Equipped with ViewSonic's unique ViewMode feature, this display provides intuitive presets that deliver optimized screen performance for different applications. In addition, Flicker-Free technology and a Blue Light Filter help to eliminate eye strain from extended viewing periods.

Key Features:

5:4 aspect ratio and 1280x1024 native resolution for legacy applications

SuperClear image enhancement technology for wide-angle viewing

ViewMode technology delivers superior color rendering and intuitive settings

Flicker-Free and Blue Light Filter technology for more comfortable viewing

DVI and VGA inputs for flexible connectivity

Designed for:


Government

Business

Education

LED Monitor with SuperClear® IPS

VA951S

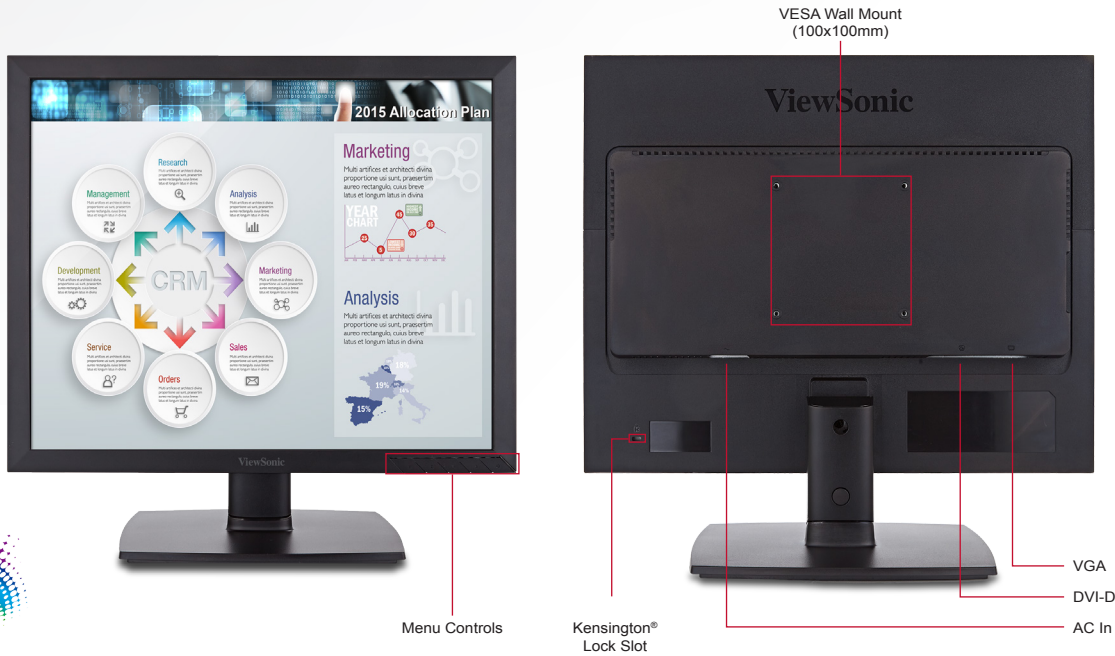

Specifications

LCD PANEL	Type	Color a-Si TFT Active Matrix IPS
	Display Area	14.8" horizontal x 11.8" vertical; 19" diagonal
	Optimum Resolution	1280x1024
	Brightness	250 cd/m2 (typ.)
	Contrast Ratio	1000:1 (typ.)
	Dynamic Contrast Ratio	20,000,000:1
	Viewing Angles	178° horizontal, 178° vertical
	Colors	16.7M (true 8-bit)
	Response Time	14ms (GTG)
	Backlight	White-light LED
	Backlight Life	30,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)
VIDEO INPUT	Digital	VGA, DVI
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
	Sync	Separate Sync, Composite Sync, Sync on Green
COMPATIBILITY	PC	Up to 1920x1080 non-interlaced
	Mac®	Up to 1920x1080
CONNECTOR	Video In	VGA, DVI-D
	Power	External power adapter
CONTROLS	Front Panel Buttons	Power, 1, Up, Down, 2
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

ERGONOMICS	Tilt	Forward 5° / Back 25°
POWER	Voltage	AC 100-240V (universal), 50 / 60Hz
	Consumption	20W (typ.) / 22W (max.)
	Optimize	16W (typ.)
	Conserve	13W (typ.)
OPERATING CONDITIONS	Temperature	32-104° F (0-40° C)
	Humidity	20-90% (non-condensing)
DIMENSIONS (W x H x D)	Physical with Stand	16.4 x 15.8 x 7.8 in. / 416.2 x 402.2 x 199.1 mm
	Physical without Stand	16.4 x 13.4 x 2.0 in. / 416.2 x 341.2 x 49.9 mm
	Packaging	18.4 x 17.8 x 5.0 in. / 498 x 455 x 126 mm
WEIGHT	Net with Stand	6.6 lb. / 3.0 kg
	Net without Stand	6.0 lb. / 2.7 kg
	Gross	9.2 lb. / 4.2 kg
REGULATIONS		UL, CUL, FCC-B (ICES-003B), CB, CE, TCO6.0 (for HSD panel), EAC, Hygienic (20 copies), ENERGY STAR, CCC, CEL, PSB, C-TICK, BSMI, WEEE, RoHS, EPEAT
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WALL MOUNT	VESA®	100 x 100 mm
WARRANTY		Three-year limited warranty on parts, labor and backlight

What's in the box?

VA951S monitor, Power cable, VGA cable, Quick Start Guide, ViewSonic Wizard CD (User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.