

The 22" (21.5" Viewable) Widescreen LED

VG2228wm-LED




ViewSonic's VG2228wm-LED is one of the new members of ViewSonic's VG 28 family. Its 22" (21.5" Viewable) display with a native 1920x1080 resolution is big enough to replace dual-monitor setups. What makes it even more appealing are full ergonomic features including height adjust, swivel and tilt. While DVI and VGA connectors provide diverse input options, the 2-port USB hub gives clutter-free and convenient USB device connectivity. The slim bezel design coupled with hidden stereo speakers make the VG2228wm-LED a space saver. You can put it on your desk or mount on your wall or on any VESA® compliant monitor stand. The ECO-mode saves up to 30%* in from power consumption. With ViewSonic's strongest pixel performance guarantee and 3-year limited warranty, you will have peace of mind in your investment.

- 1 Up to 50% energy savings with LED***
Backlight without compromising viewing quality and has eco-friendly mercury-free LED backlight.
- 2 Multi-functional base design (360° swivel, Height adjustment)**
VESA® compliant wall-mount interface and detachable base for ergonomic flexibility with 3.1 height, tilt and 360° swivel adjustments.
- 3 USB Hub**
Stereo speakers provide easy connectivity for USB devices.
- 4 Multimedia Enhanced**
Stereo speakers provide clear and rich sound.
- 5 OptiSync® digital/analog inputs expand your connectivity**
Multi-mode input technology supports both digital (DVI) and analog (VGA) signals for ultimate compatibility and configuration flexibility.
- 6 Eco-Mode***
Environmentally-friendly Eco-mode reduces power consumption and extends backlight life.
- 7 Stylish slim-bezel design**
An ultra-thin bezel lets you see more without taking up valuable desktop real estate.

The 22" (21.5" Viewable) Widescreen LED

VG2228wm-LED

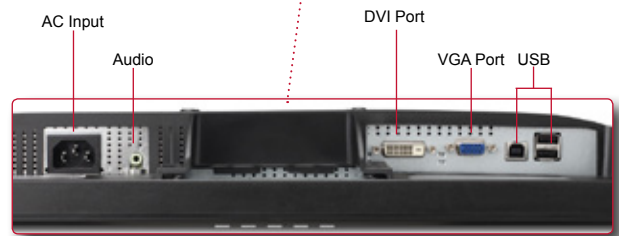

Specifications

Display	22" (21.5" Viewable) wide color TFT Active Matrix LED
Resolution	1920x1080
Brightness	250 cd/m ² (typ)
Contrast Ratio	1000:1 static (typ)
Dynamic Contrast Ratio	10,000,000:1
Viewing Angles	170° horizontal, 160° vertical
Response Time	5ms (typ)
Input Signal	Analog: RGB analog (0.7/1.0 Vp-p, 75 ohms) Digital: DVI-D (TMDS, 100 ohms) Sync: Fh= 24 ~82 kHz ; Fv=50 ~75 Hz
Audio	Speakers: 2x2W
Compatibility	PC and compatibles: VGA up to 1920x1080 non-interlaced Mac: Up to 1920x1080
Power Voltage	AC 100~240V (universal), 50/60Hz (auto switch)
Power Consumption	Consumption: 21W (typ) Eco-mode: 18W (optimize) / 14W (conserve) Power Save: <0.5W
Physical Dimensions (WxHxD)	With stand: 20.11" x 16.2" x 9.1" (510.9mm x 412.02mm x 230mm) Without stand: 20.11" x 12.0" x 2.48" (510.9mm x 305.9mm x 61.7mm)
Packaging Dimensions (WxHxD)	22.9" x 19.7" x 6.3" (582mm x 500mm x 160mm)
Weight	With stand: 9.8 lb. (4.4 kg) Without stand: 7.7 lb. (3.5 kg)
Regulations	CB, TCO'05, WEEE, RoHS, UL/cUL, FCC-B, IRAM, NOM, ENERGY STAR®, EPEAT Silver ERGO, CE, Ukraine, GOST-R+Hygienic, SASO, BSMI, PSB, C-TICK, KCC, CCC
Warranty	Three-year limited warranty on parts, labor and backlight.

Package Contents

VG2228wm LED display, power cable, video cable, audio cable, USB cable, Quick Start Guide, ViewSonic Wizard CD-ROM, Quick Start Guide.



Swivel: 360°

Height Adjust: 3.1"

Tilt: Down -5°, up 20°



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

*Energy savings may vary based on costs, actual usage and other factors. Program specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2011 ViewSonic Corporation. All rights reserved. [15930-00B-11/11] VG2228wm-LED