

SuperClear® IPS LED Monitor with Full Ergonomics

5:4 Aspect Ratio with 1280x1024 Resolution

VG939Sm



Designed for legacy and customized applications that require a 5:4 aspect ratio, the ViewSonic VG939Sm display with 1280x1024 resolution and SuperClear IPS panel technology delivers stunning front of screen performance. Equipped the ViewSonic's unique ViewMode feature, this display provides intuitive presets that deliver optimized screen performance for different applications. With a compact square shape, this 19" display can be used as a countertop monitor in retail and public environments with space constraints

Key Features:

5:4 aspect ratio and 1280x1024 native resolution for legacy applications

Ergonomic swivel, pivot, and height-adjustable design for maximum comfort and productivity

DVI and VGA inputs for flexible connectivity

ViewMode technology delivers superior color rendering and intuitive settings

SuperClear image enhancement technology for wide-angle viewing

Designed for:

Government

Business


Education

SuperClear® IPS LED Monitor with Full Ergonomics

VG939Sm



Menu Controls

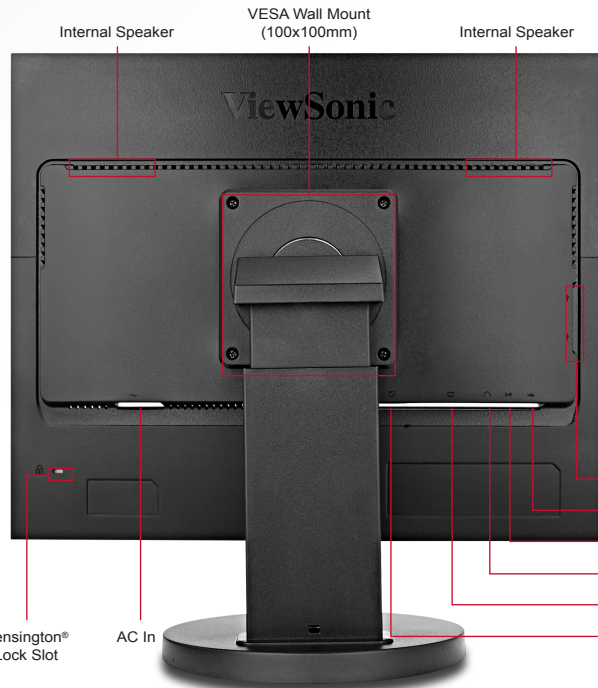

Internal Speaker

VESA Wall Mount (100x100mm)

Internal Speaker

Kensington® Lock Slot

AC In

USB 3.0 (x2)

USB Type B

Audio In

Headphones

VGA

DVI-D



Specifications

LCD PANEL	Type	Color a-Si TFT Active Matrix IPS
	Display Area	14.8" horizontal x 11.8" vertical; 19" diagonal
	Optimum Resolution	1280x1024
	Brightness	250 cd/m2 (typ.)
	Contrast Ratio	1000:1 (typ.)
	Dynamic Contrast Ratio	20,000,000:1
	Viewing Angles	178° horizontal, 178° vertical
	Colors	16.7M (true 8-bit)
	Response Time	14ms (GTG)
	Backlight	White-light LED
Backlight Life	30,000 hours (min.)	
Panel Surface	Anti-glare, hard-coating (3H)	
VIDEO INPUT	Digital	VGA, DVI
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
	Sync	Separate Sync, Composite Sync, Sync on Green
AUDIO OUTPUT	Speakers	2-watt (x2)
COMPATIBILITY	PC	Up to 1280x1024 non-interlaced
	Mac®	Up to 1280x1024
CONNECTOR	Video In	VGA, DVI-D
	Audio In	3.5mm mini jack
	USB	USB 3.0 (x2), USB Type B
	Power	Internal Power Board, 3-pin plug (CEE22)
CONTROLS	Front Panel Buttons	Power, 1, Up, Down, 2
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

ERGONOMICS	Tilt	Forward 5° / Back 25°
	Swivel	360°
	Pivot	90°
	Height Adjust	0~100 mm
POWER	Voltage	AC 100~240V (universal), 50 / 60Hz
	Consumption	18W (typ.) / 20W (max.)
	Optimize	16W (typ.)
	Conserve	15W (typ.)
OPERATING CONDITIONS	Temperature	32~104° F (0~40° C)
	Humidity	20~90% (non-condensing)
DIMENSIONS (W x H x D)	Physical with Stand	16.4 x 14.8 x 8.0 in. / 416.2 x 376 x 204.3 mm
	Physical without Stand	16.4 x 13.4 x 2.0 in. / 416.2 x 341.2 x 49.9 mm
	Packaging	18.7 x 16.3 x 6.5 in. / 476 x 414 x 165 mm
WEIGHT	Net with Stand	9.6 lb. / 4.3 kg
	Net without Stand	6.1 lb. / 2.75 kg
	Gross	13.3 lb. / 6.0 kg
REGULATIONS		ENERGY STAR, CCC, CEL, UL/cUL, FCC (ICES003), EPEAT, Mexico energy
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WALL MOUNT	VESA®	100 x 100 mm
WARRANTY		Three-year limited warranty on parts, labor and backlight

What's in the box?

VG939Sm monitor, Power cable, VGA cable, DVI cable, audio cable, Quick Start Guide, ViewSonic Wizard CD (User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.